



BULLETIN

From:	The Stewards	Bulletin No:	1.08
To:	All 125 Senior Competitors	Date:	4th December 2023
	All Officials	Time:	16:16 hrs

This corrects the previous bulletin
The Stewards notify all competitors and officials of the following:


Corrections to RMC GF 2023 Technical Regulations:

4.5. Exhaust valve (125 Senior MAX and 125 MAX DD2)

System must be used with all components fitted as shown in the illustration. For the new cylinder protection the protection plate (45) does not exist. ~~The cylinder protection plate (45) is mandatory to be installed and must have a minimum thickness of 0,08mm. It is possible for the cylinder protection plate (45) to show signs of wear or damage.~~
Bellow (10) must have green colour.


Exhaust valve

Length of the exhaust valve (item 2): 36,5 mm +0,20 mm/-0,30 mm.
Width of collar: 4,8 mm +/-0,3 mm

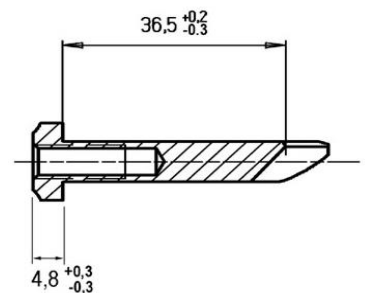

~~Distance of exhaust valve flange at cylinder to piston~~

- ~~1. Turn crankshaft until the piston completely closes the exhaust port.~~
- ~~2. Insert the exhaust valve gauge (Rotax reference to be defined in a Bulletin) as shown in the picture until it stops at the flange.~~
- ~~3. Measure from the end of the gauge to the stopper surface for the exhaust valve.~~
- ~~4. Measurement must be done on both sides (upper and lower)~~
- ~~5. The measurement must not exceed (Measure to be defined in a Bulletin).~~

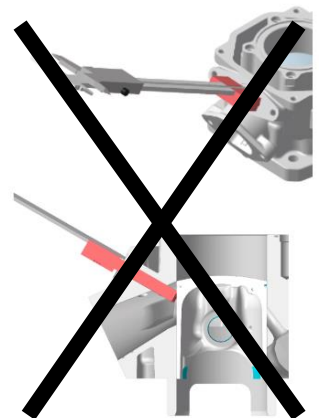

Victor SOUSA (PRT)
Steward (Chairman)

Fayez RAMZY (BHR)
Steward

João AZEVEDO (PRT)
Steward

Supported by:

#MOJO

XPS

BELL HELMETS

SODI

birelART

CHARLES LECLERC

Praga

DELORIO

WROTH

© 2023 BRP-Rotax GmbH & Co KG. All rights reserved. ® and TM and the BRP logo are trademarks of Bombardier Recreational Products Inc. or its affiliates. All other trademarks are the property of their respective owners.

João Azevedo
Stewards Board Gr.1
Lic.No.CDI PT23/1070
2023-12-04 16:21

Victor Sousa
Chief Steward Gr.1
Lic.No.CDI PT23/0010
2023-12-04 16:21